


NOTE:

PIPE SHALL BE LAID AND CONNECTED IN THE BEDDING WHICH SHALL CONSIST OF: COMPACTED EXISTING SUBSOIL WHEN LAID ABOVE GROUND WATER, OR 3/4" CRUSHED STONE WHEN LAID BELOW GROUND WATER. ALL UNSUITABLE MATERIAL SHALL BE REMOVED FOR AT LEAST 2'-6" BELOW THE PIPE OR TWICE THE PIPE DIAMETER, WHICHEVER IS GREATER AND REPLACED WITH COMPACTED BEDDING MATERIAL

## STORM PIPE BEDDING DETAIL

SCALE: N.T.S.

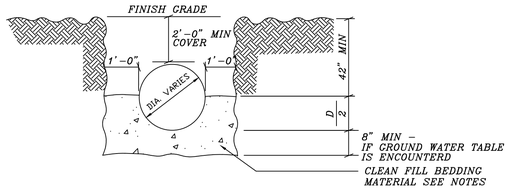





NOTES

THE CONCRETE STRUCTURE and FRAME/GRATE SHALL BE H-20 TRAFFIC RATED.

## CATCH BASIN/YARD DRAIN DETAIL

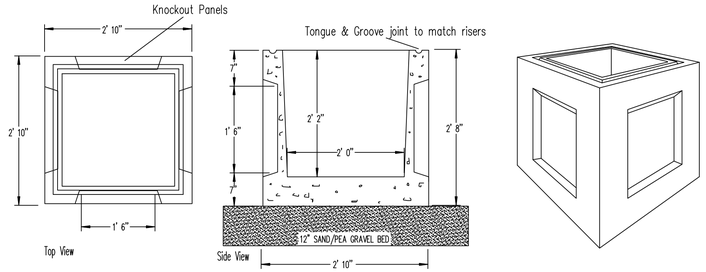SCALE: N.T.S.




INSTALLATION NOTES

1. AREA CHOSEN FOR STOCKPILING OPERATIONS SHALL BE DRY AND STABLE.
2. MAXIMUM SLOPE OF STOCKPILE SHALL BE 1:2.
3. UPON COMPLETION OF SOIL STOCKPILING, EACH PILE SHALL BE SURROUNDED WITH EITHER SILT FENCING OR STRAWBALES, THEN STABILIZED WITH VEGETATION OR COVERED.
4. SEE SPECIFICATIONS (THIS SHEET) FOR INSTALLATION OF SILTFENCE.

## SOIL STOCKPILING DETAILS

SCALE: N.T.S.

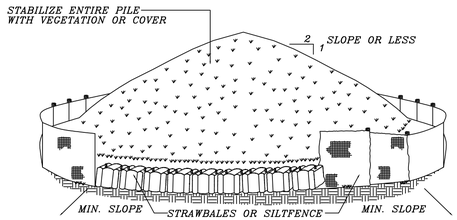


PLAN

Not to Scale




ISOMETRIC

Not to Scale

## TYPICAL TRASH ENCLOSURE

SCALE: N.T.S.

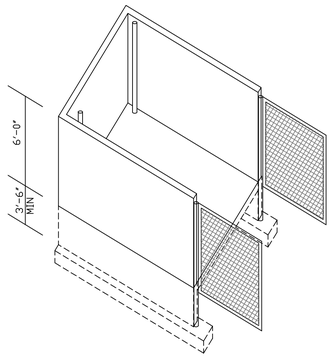NOTES:

1. THE FACE OF THE ENCLOSURE SHALL BE FINISHED WITH SPLIT FACED BLOCK (VERTICAL REBAR EVERY OTHER VOID AND CEMENT FILL)
2. THE BUILDING INSPECTOR SHALL APPROVE THE CONSTRUCTION METHODS AND CODE COMPLIANCE OF ALL STRUCTURES ERECTED IN THE TOWN OF WAPPINGER.
3. A MECHANISM FOR LOCKING THE GATES IN THE OPEN POSITION AND CLOSED POSITION SHALL BE PROVIDED.




NOTE:

PROVIDE 1/2" EXPANSION JOINT IN CONC CURB EVERY TEN FEET. CONSTRUCT CURB WITH CLASS A CONCRETE (3000 PSI)

## CONC CURB DETAIL

SCALE: N.T.S.




PROPOSED SIGN DETAIL
for CASA AMIGOS II
(REAR SIGN - OLD RTE. 9)




## SECTION WITHOUT CURB

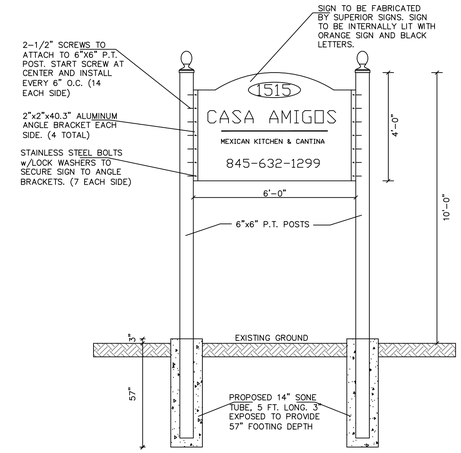


## CONSTRUCTION SPECIFICATIONS

1. WOVEN WIRE FENCE TO BE FASTENED SECURELY TO FENCE POSTS WITH WIRE TIES OR STAPLES. POSTS SHALL BE STEEL EITHER 'T' OR 'U' TYPE OR HARDWOOD.
2. FILTER CLOTH TO BE TO BE FASTENED SECURELY TO WOVEN WIRE FENCE WITH TIES SPACED EVERY 24" AT TOP AND MID SECTION. FENCE SHALL BE WOVEN WIRE, 6" MAXIMUM MESH OPENING.
3. WHEN TWO SECTIONS OF FILTER CLOTH ADJOIN EACH OTHER THEY SHALL BE OVER-LAPPED BY SIX INCHES AND FOLDED. FILTER CLOTH SHALL BE EITHER FILTER X, MIRAFI 100X, STABILINKA T140N, OR APPROVED EQUIVALENT.
4. PREFABRICATED UNITS SHALL BE GEOFAB, ENVIROFENCE, OR APPROVED EQUIVALENT.
5. MAINTENANCE SHALL BE PERFORMED AS NEEDED AND MATERIAL REMOVED WHEN "BULGES" DEVELOP IN THE SILT FENCE.
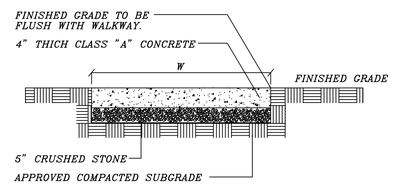
| | |
|---|---|
| ADAPTED FROM DETAILS PROVIDED BY: USDA - NRCS, NEW YORK STATE DEPARTMENT OF TRANSPORTATION, NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION, NEW YORK STATE SOIL & WATER CONSERVATION COMMITTEE | SILT FENCE |

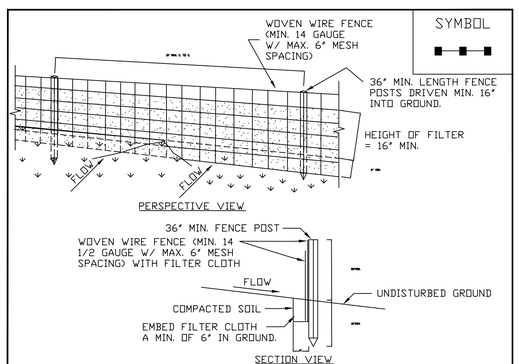


## TYPICAL TREE PLANTING DETAIL

SCALE: N.T.S.




PLAN

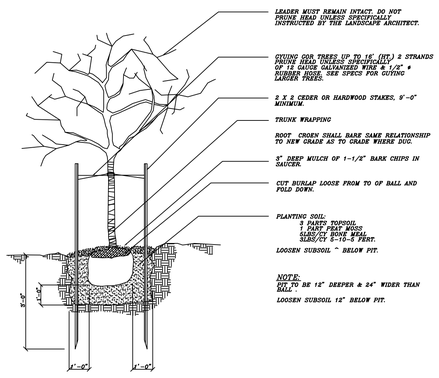


## SECTION WITH CURB

NOTES

1. MINIMUM CROSS SLOPE 1/8" PER FT. UNLESS OTHERWISE INDICATED ON DRAWINGS
2. PROVIDE 1/4" PREMOLDED EXPANSION JOINTS AT 6' INTERVALS.
3. AT THE JUNCTURE OF DRIVEWAYS AND SIDEWALKS, ONE-HALF (1/2") INCH, PREMOLDED BITUMINOUS JOINTS SHALL BE INSTALLED

SCALE: N.T.S.
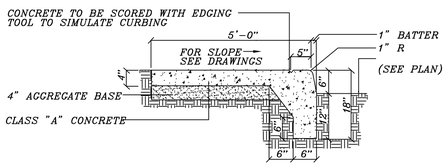
## CONCRETE CURB & SIDEWALK DETAIL

SCALE: N.T.S.




FRONT ELEVATION

SIDE ELEVATION

RELOCATED SIGN DETAIL
for CASA AMIGOS II

General Notes

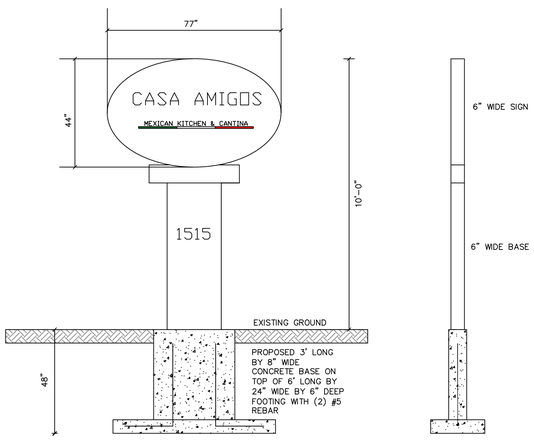UNAUTHORIZED ALTERATIONS OR ADDITIONS TO THIS DRAWING IS A VIOLATION OF SECTION 7209(2) OF NYS EDUCATION LAW.

| No. | Revision/Issue | Date |
|---|---|---|
| 5 | PHASING PLAN | 11/19/25 |
| 4 | FRONT SIGN DETAIL ADDED TO DETAIL SHEET | 10/29/25 |
| 3 | TOWN PLANNER COMMENTS | 10/20/25 |
| 2 | TOWN ENGINEER COMMENTS | 9/12/25 |
| 1 | TOWN PLANNER COMMENTS | 8/15/25 |


JEFFREY A. ECONOM, P.E.
CONSULTING ENGINEER
48 LOGANBERRY COURT
HOPEWELL JUNCTION, N.Y. 12533
PHONE: (845) 554-8442
EMAIL: jaeconom@optonline.net


SITE DETAILS
for
CASA AMIGOS 2 RESTAURANT
1515 NYS ROUTE 9
WAPPINGER, NY 12590
TOWN OF WAPPINGER, DUTCHESS COUNTY

| | |
|---|---|
| Project: c:\jobs\25-11\CASA AMIGOS 2 SITE PLAN.dwg | |
| Date: 06/12/25 | Sheet: SD |
| Scale: AS NOTED | |