


- NOTES:**
1. WOVEN WIRE FENCE TO BE FASTENED SECURELY TO FENCE POSTS WITH WIRE TIES OR STAPLES. POSTS SHALL BE STEEL "T" OR "U" TYPE OR HARDWOOD.
  2. FILTER CLOTH TO BE FASTENED SECURELY TO WOVEN WIRE FENCE WITH TIES SPACED EVERY 24" AT TOP AND MID SECTION. FENCE SHALL BE WOVEN WIRE, 6" MAX MESH OPENING.
  3. WHEN TWO SECTIONS OF FILTER CLOTH ADJOIN EACH OTHER THEY SHALL BE OVERLAPPED BY 6" AND FOLDED.
  4. MAINTENANCE SHALL BE PERFORMED AS NEEDED AND MATERIALS REMOVED WHEN "BULGES" DEVELOP IN THE SILT FENCE.
  5. MAXIMUM DRAINAGE AREA FOR OVERLAND FLOW TO A SILT FENCE SHALL NOT EXCEED 1/4 ACRE PER 100 FEET OF FENCE.
  6. SILT FENCE SHALL BE USED WHERE EROSION COULD OCCUR IN THE FORM OF SHEET EROSION.
  7. SILT FENCE SHALL NOT BE USED WHEN A CONCENTRATION OF WATER IS FLOWING TO THE BARRIER.
  8. MAXIMUM ALLOWABLE SLOPE LENGTHS CONTRIBUTING RUN-OFF TO A SILT FENCE ARE:
- | SLOPE STEEPNESS | MAXIMUM SLOPE LENGTH(FT) |
|-----------------|--------------------------|
| 2:1             | 25                       |
| 3:1             | 50                       |
| 4:1             | 75                       |
| 5:1 OR FLATTER  | 100                      |

### SILT FENCE DETAIL

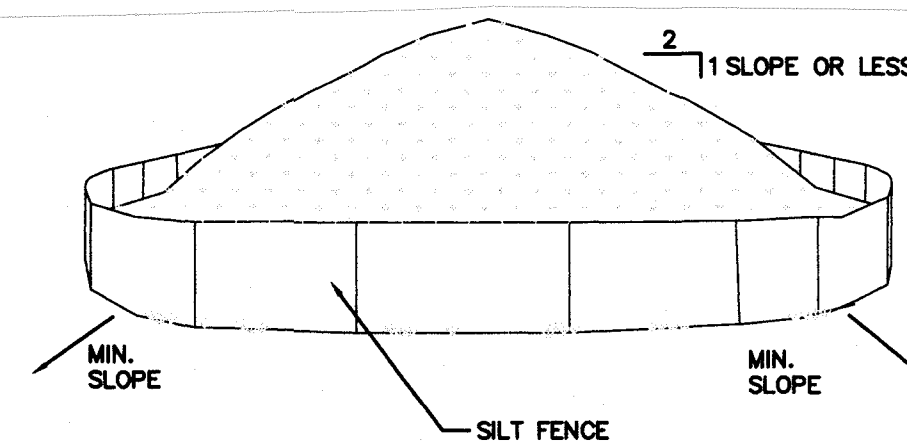

- NOTES:**
1. AREA CHOSEN FOR STOCKPILING OPERATIONS SHALL BE DRY AND STABLE.
  2. MAXIMUM SLOPE OF STOCKPILE SHALL BE 1V:2H.
  3. UPON COMPLETION OF SOIL STOCKPILING, EACH PILE SHALL BE SURROUNDED WITH SILT FENCING, THEN STABILIZED WITH VEGETATION OR COVERED.
  4. SEE SPECIFICATIONS FOR INSTALLATION OF SILT FENCE.
  5. HAYBALES TO BE USED WHERE STOCKPILES ARE LOCATED ON PAVED AREAS.

### TEMPORARY TOPSOIL STOCKPILE

#### CONSTRUCTION SEQUENCING

1. ESTABLISH A TEMPORARY STABILIZED CONSTRUCTION ENTRANCE.
2. INSTALL SILT FENCE AS SHOWN ON THIS PLAN. INSTALL CONSTRUCTION FENCE TO PROTECT EXISTING FACILITIES AND OPERATIONS AS SHOWN ON THE PLANS AND/OR AS DIRECTED BY THE TOWN.
3. NOTIFY DESIGN ENGINEER FOR INSPECTION OF EROSION CONTROL MEASURES FOR APPROVAL BEFORE CONTINUING WITH EARTH DISTURBING ACTIVITIES.
4. CLEAR THE MINIMUM AMOUNT OF BRUSH AND TREES WITHIN THE DEVELOPMENT AREA THAT WILL ALLOW PERFORMANCE OF THE WORK.
5. CONSTRUCT TEMPORARY MATERIAL STORAGE AND SOIL STOCKPILE AREAS.
6. AS CONCRETE IS DELIVERED AND PLACED ON SITE, A CENTRALLY LOCATED CONCRETE WASHOUT AREA APPROXIMATELY 15-FOOT SQUARE AND 2.5-FOOT DEEP SHALL BE PROVIDED. THIS WASHOUT AREA SHALL BE ENCLOSED BY SILT FENCE, LOCATED NEXT TO A PAVED ROAD AND SITUATED A MINIMUM OF 50-FEET FROM A WATERCOURSE. IF REQUIRED, TEMPORARY DIVERSION DIKES SHALL BE INSTALLED AROUND WASHOUT AREA TO PREVENT STORMWATER FROM ENTERING WASHOUT LOCATION.
7. WASTE MATERIAL FROM CONCRETE WASHOUT OPERATIONS SHALL BE PERIODICALLY REMOVED AND LEGALLY DISPOSED OF WHEN TWO-THIRDS OF THE WASHOUT STORAGE AREA HAS ACCUMULATED WITH MATERIAL. AT THE END OF CONSTRUCTION, ALL MATERIAL FROM THE WASHOUT AREA SHALL BE REMOVED AND DISPOSED OF.
8. STABILIZE TOPSOIL STOCKPILE AREAS WITH SEED AND MULCH.
9. EXCAVATE BIORETENTION AREAS AS TEMPORARY SEDIMENT TRAPS AS NECESSARY; CLEAN OUT BASIN AREAS AND CONSTRUCT BIO-RETENTION AREAS AFTER TRIBUTARY AREAS ARE STABILIZED.
10. PERFORM REQUIRED GRADING AND EARTHWORK (CUT AND FILL) OPERATIONS INCLUDING STORMWATER MANAGEMENT BASIN.
11. PROTECT ALL CATCH BASINS WITHIN THE RAIN GARDEN AND BIORETENTION AREAS WITH INLET PROTECTION.
12. INSTALL UTILITIES, PAVING, SIDEWALKS AND OTHER SITE IMPROVEMENTS. DO NOT CONNECT NEW STORMWATER UTILITIES TO THE BIORETENTION AREA UNTIL TRIBUTARY AREAS ARE STABILIZED AND/OR INLETS ARE PROTECTED FROM SEDIMENTATION.
13. STABILIZE DISTURBED AREAS WITH SEED AND MULCH OUTSIDE AREAS TO RECEIVE PAVEMENT.
14. REMOVE SILT FENCE, TEMPORARY CONSTRUCTION ENTRANCE AND INLET PROTECTION WHEN A STABILIZING PERMANENT STAND OF VEGETATION IS ACHIEVED.